## **MORSØ 3400 SERIES**

Morsø 3400 series offers the consumer many choices in style and heating options. These models are clean burning non-catalytic woodburning stoves that are the perfect choice to heat medium sized areas. The 3400 Series also has excellent clearances to combustibles so less room space is needed. The Morsø 3410 is a radiant stove with standard stove legs. The Morsø 3440 is a convection stove, where the legs are replaced with cast iron panels. These panels act as heat exchangers drawing cool air from the floor. This air is heated and flows naturally into the room and adjacent areas, giving off a more even temperature. The Morsø 3450 soapstone is a radiant stove with elegant soapstone side panels. These panels absorb heat from the firebox and slowly release it into the room.

The appeal of cast iron lies not only in its ability to absorb heat from the fire and releasing it slowly into your home long after the fire is out, but also in the aesthetically pleasing forms with which it can be shaped. Morsø craftsmen produce the finest cast iron wood stoves in the world. The name Morsø has been synonymous with quality since April 1853. In 1915 Morsø received the honor of being appointed to the Royal Danish Court. This prestigious appointment means that the products produced are held to the highest standards of quality and that the companies themselves have demonstrated exceptional business practices and ethics.





Morsø 3450 Shown with Classic Deluxe Toolset, Morsø 2.0 liter Kettle, and Morsø Steel Hearth Pad



Morsø 3410
- Shown with standard leg option.



Morsø 3410
- Shown with long leg option. Increases height by 1.5".



Morsø 3440 - Convection Stove.


## 3400 SERIES SPECIFICATIONS


Height (3410)
Height (3440 & 3450)
Width (3410)
Width (3440 & 3450)
<b>Depth</b> (leg to leg)
Flue Collar Height (3410) (Rear exit)
Flue Collar Height (3440 & 3450) (Rear exit) 24.1" (C/L) (D)
Measurement of stove
rear to centerline of top flue collar (3410) $\ \ldots \ \ldots \ 6.3"$ (E)
rear to centerline of top flue collar (3440 & 3450) $\ \ldots \ 6.6"$ (E)
Flue Collar Height (3410) (Top exit) 28.3" (F)
Flue Collar Height (3440 & 3450) (Top exit) 30.3" (F)
Flue Collar Size6"
<b>Btu's Max.</b>
Burn Time
<b>Avg. Area Heated</b>
<b>Log Length</b>
<b>EPA Grams per Hr.</b>

## 3400 CLEARANCES

Single or Double Wall Chimney Connector	3410/3450	3440
Top Plate to Rear Wall:	12"	8"
Top Plate to Side Wall:	16"	8"
To Plate to Corner Wall:	12"	6"
Fireplace Installation:		
Top Plate to Mantel (10" mantel depth):	20"	20"
Top Plate to Top Trim (1.5" trim depth):	19"	19"
Top Plate to Side Trim:	8"	8"

The 3400 Series has been approved for use in mobile homes. Please consult the Owner's Guide for detailed specifications.



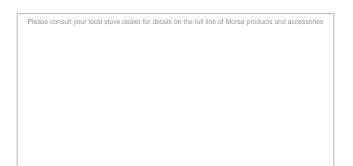



Modern contemporary design with clean lines. 148 years of cast iron experience means top quality castings that sets the industry standard

- Non catalytic clean burn technology which has passed strict EPA emissions test for more complete combustion and high heat output
- Both rear and bottom heat shields for reduced clearances and better heat convection are standard
- · Excellent clearances
- Reversible flue collar for either top or rear venting gives added installation flexibility
- Superior air wash system keeps the glass clean for unparalleled fire viewing
- Single air control for ease of operation
- Beautiful, high quality detachable stainless steel handle
- Rugged ash pan made of heavy gauge steel
- Gasketed cast iron stove plates provide tight seals that require less maintenance through years of operation
- Chromium treated internal castings give added strength and durability
- 10 year limited warranty

## **Options:**

- Convection, radiant or soapstone version
- Long leg option for the 3410
- · Outside air kit



